

WALLY



43wallytender

concept

sheltered open-air living

multifunctional runabout

walkaround practicality

cockpit protection

deck configuration versatility



pure, simple, fast, stylish and magnificently seaworthy





enhanced visibility

user-friendly joy-stick controls for easy manoeuvring



high-speed sheltered passenger and driver experience

 performance

laminated sail cloth reducing displacement

only two strut extra-large carbon t-top



supreme protection at any speed





wave piercing vertical bow



smooth ride with deep V hull and automated interceptors




flush, open aft deck



sink concealed in cabinets with fridge



wraparound glass windshield

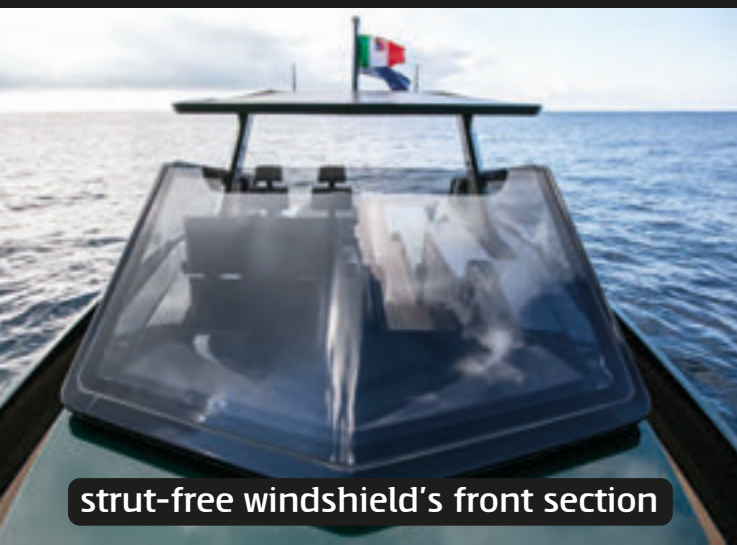

strut-free windshield's front section



foredeck sunpad



push-button anchor system



gyro stabiliser

air-conditioned cockpit

teak decking

opening bulwarks
as standard

removable shower bar

retractable swim ladder/passerelle

 **comfort**



convivial seating

carbon fold-out table



innovative center cockpit layout

secure flanking walkways

wraparound fender



interior

air-conditioned cabin







generous bathroom with separate shower



exclusive head-turning color range



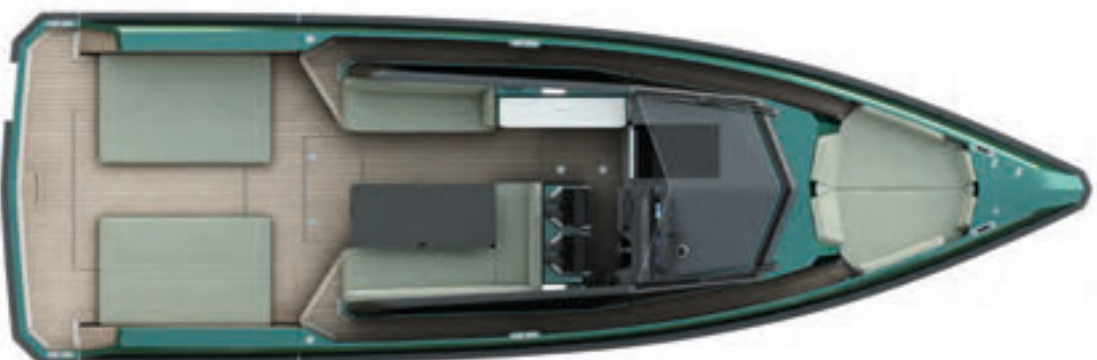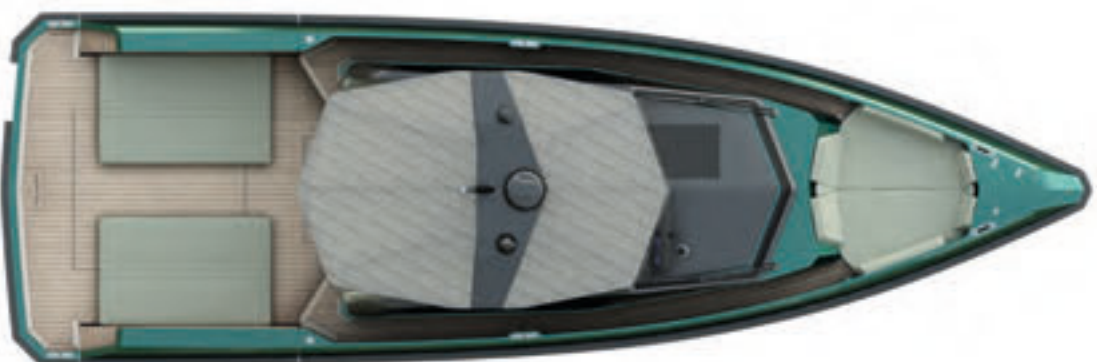

43wallytender

MAIN TECHNICAL SPECIFICATIONS - PRELIMINARY

ENGINES

STD: 2 x VOLVO PENTA D6-380 DPI
power at 3500 rpm 279 kW 380 mhp

OPT: 2 x VOLVO PENTA D6-440 DPI
power at 3700 rpm* 324 kW 440 mhp

SPEED

maximum speed 36 knots / 40 knots
cruising speed 30 knots / 32 knots

RANGE

maximum speed 300 NM / 280 NM
cruising speed 320 NM / 320 NM

MAIN SIZES

loa = length overall (ISO 8666)	13,2 m	43 ft 2 in
lh = length hull (ISO 8666)	13 m	42 ft 6 in
lwl = length waterline (full load)	12 m	39 ft 4 in
maximum beam	4,3 m	14 ft 1 in
depth under propellers (full load)	1,2 m	3 ft 9 in
displacement (light ship)	9 t	19842 lb
displacement (full load)	12 t	26455 lb
maximum number of persons on board		12
design category directive 2013/53/EU		B
certification modules	B+F	RINA Spa

TECHNICAL DATA

hull type: warped hull with spray rails and aft deadrise	21°
H = overall height	4,7 m 15 ft 3 in
P = pulpit + transom	0,2 m 0 ft 8 in
fuel tank capacity	1200 l 317 US gal
water tanks capacity	200 l 53 US gal

PERFORMANCE SPECIFICATIONS

the performance is estimated at the following conditions:

standard version displacement	9,8 t	21611 lb
-------------------------------	-------	----------

at 1/3 of load, clean hull, 25°C air temperature,
good weather conditions, 4 persons on board

overloading the yacht by	0,5 t	1102 lb
top speed decreases of		1 knot



wally.com